


Polyetylénové klzné vedenie


Polyäthylene Kettenführungen

Polyethylene chain guide rails

„E“ profil		Rozmery	ISO Nr.	H mm	M ₁ mm	W mm	T mm	Q kg/m
AxB								
GC-E-06	10x20	3/8"x7/32"	06 B-1	1,5	15	5,4	4,35	0,188
GC-E-08	15x25	1/2"x5/16"	08 B-1	2,2	16,3	7,4	1,6	0,352
GC-E-10	15x28	5/8"x3/8"	10 B-1	2,6	19,2	9,2	2,1	0,394
GC-E-12	20x38	3/4"x7/16"	12 B-1	2,4	28	11,3	11,11	0,564
GC-E-16	25x51	1"17,02 mm	16 B-1	3,5	41	16,5	16,48	0,830

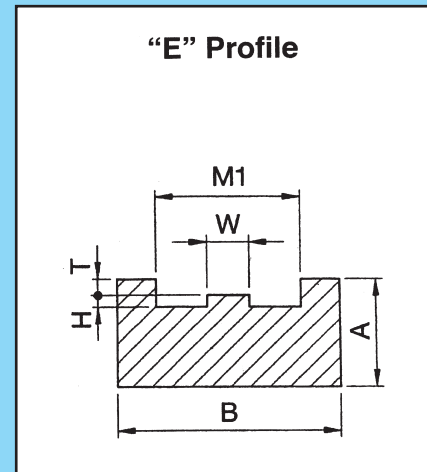

„K“ profil		Rozmery	ISO Nr.	H mm	D mm	E mm	F mm	G mm	C mm	Q kg/m
AxB										
GC-K-06	25x20	3/8"x7/32"	06 B-1	10	6,8	4	5,6	8,7	9,3	0,430
GC-K-08	30x24	1/2"x5/16"	08 B-1	12,7	9	5	7,4	11,5	12,8	0,550
GC-K-10	35x30	5/8"x3/8"	10 B-1	14,8	10,7	6	9,3	13,5	15,4	0,830
GC-K-12	35x40	3/4"x7/16"	12 B-1	17,5	12,7	7	11,3	15,9	16,9	1,100
GC-K-16	45x40	1"17,02 mm	16 B-1	26,8	16,5	9	16,6	25,7	24,4	1,220

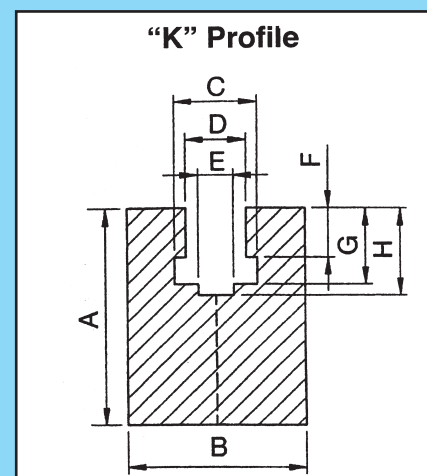

„U“ profil		Rozmery	ISO Nr.	H mm	E mm	F mm	C mm	Q kg/m
AxB								
GC-U-06	15x20	3/8"x7/32"	06 B-1	4,2	4	2,8	9,2	0,260
GC-U-08	15x25	1/2"x5/16"	08 B-1	4,8	5	3,5	12,7	0,310
GC-U-10	15x25	5/8"x3/8"	10 B-1	5,1	6	3,6	15,2	0,300
GC-U-12	20x25	3/4"x7/16"	12 B-1	5,7	7	3,9	16,7	0,400

