

Trojradové valčkové reťaze


podľa DIN 8187 (Európske)
ISO - R 606
ČSN 02 3311

Dreifach Rollenketten

nach DIN 8187 (Europäische Bauart)
ISO - R 606

Triplex roller chains

to DIN 8187 (European series)
ISO - R 606

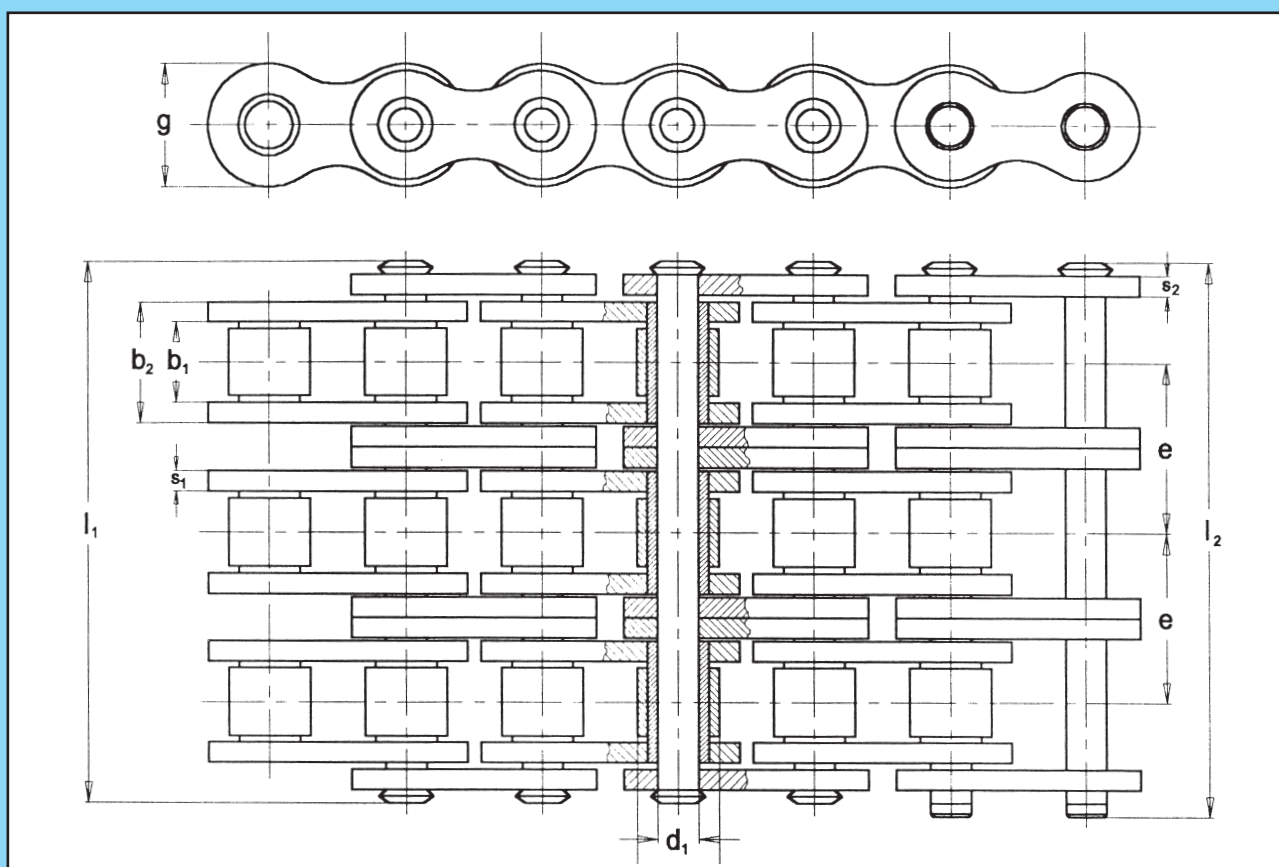

ISO Nr.	Obj. čís.	p mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h10	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	e mm	f mm ²	F _B kN min.	Q kg/m
05B-3	318 113 039 000	8,000	3,00	4,77	2,31	5,00	19,9	23,0	7,1	0,75	0,75	5,64	33	11,1	0,5
06B-3	318 113 059 000	9,525	5,72	8,53	3,28	6,35	34,0	37,3	8,2	1,30	1,30	10,24	84	24,9	1,2
08B-3	318 113 079 000	12,700	7,75	11,30	4,45	8,51	44,9	48,8	11,8	1,60	1,60	13,92	151	47,5	2,0
10B-3	318 113 099 000	15,875	9,65	13,28	5,08	10,16	52,6	56,9	14,7	1,60	1,60	16,59	202	66,7	2,8
12B-3	318 113 119 000	19,050	11,68	15,62	5,72	12,07	61,7	66,3	16,1	1,80	1,80	19,46	268	86,7	3,8
16B-3	318 113 139 000	25,40	17,02	25,40	8,28	15,88	99,9	105,3	21,0	3,50	3,00	31,88	631	165,0	7,7
20B-3	318 113 159 000	31,750	19,56	29,00	10,19	19,05	114,1	118,9	26,0	4,50	3,50	36,45	887	250,0	11,2
24B-3	318 113 179 000	38,10	25,40	37,90	14,63	25,40	150,0	155,2	33,0	6,00	5,00	48,36	1663	425,0	20,7
28B-3	318 113 199 000	44,450	30,99	46,50	15,90	27,94	184,0	188,8	36,6	7,00	6,00	59,56	2218	530,0	27,0
32B-3	318 113 219 000	50,80	30,99	45,50	17,81	29,21	181,0	190,2	41,8	7,00	6,00	58,55	2431	670,0	28,3
40B-3	318 113 239 000	63,50	38,10	55,70	22,89	39,37	225,0	230,9	52,0	8,00	8,00	72,29	3825	950,0	43,3
48B-3	318 113 259 000	76,20	45,72	70,50	29,24	48,26	281,0	290,3	63,4	12,00	10,00	91,21	6184	1500,0	72,5

f = Plocha kĺbu
F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

f = Gelenkfläche
F_B = Bruchkraft
Q = Kettengewicht

f = Bearing area
F_B = Breaking load
Q = Chain weight