

## Dvojradové valčkové reťaze


podľa DIN 8188 (Americké)  
ISO - R 606  
ČSN 02 3311

## Zweifach Rollenketten

nach DIN 8188 (Amerikanische Bauart)  
ISO - R 606

## Duplex roller chains

to DIN 8188 (American series)  
ISO - R 606

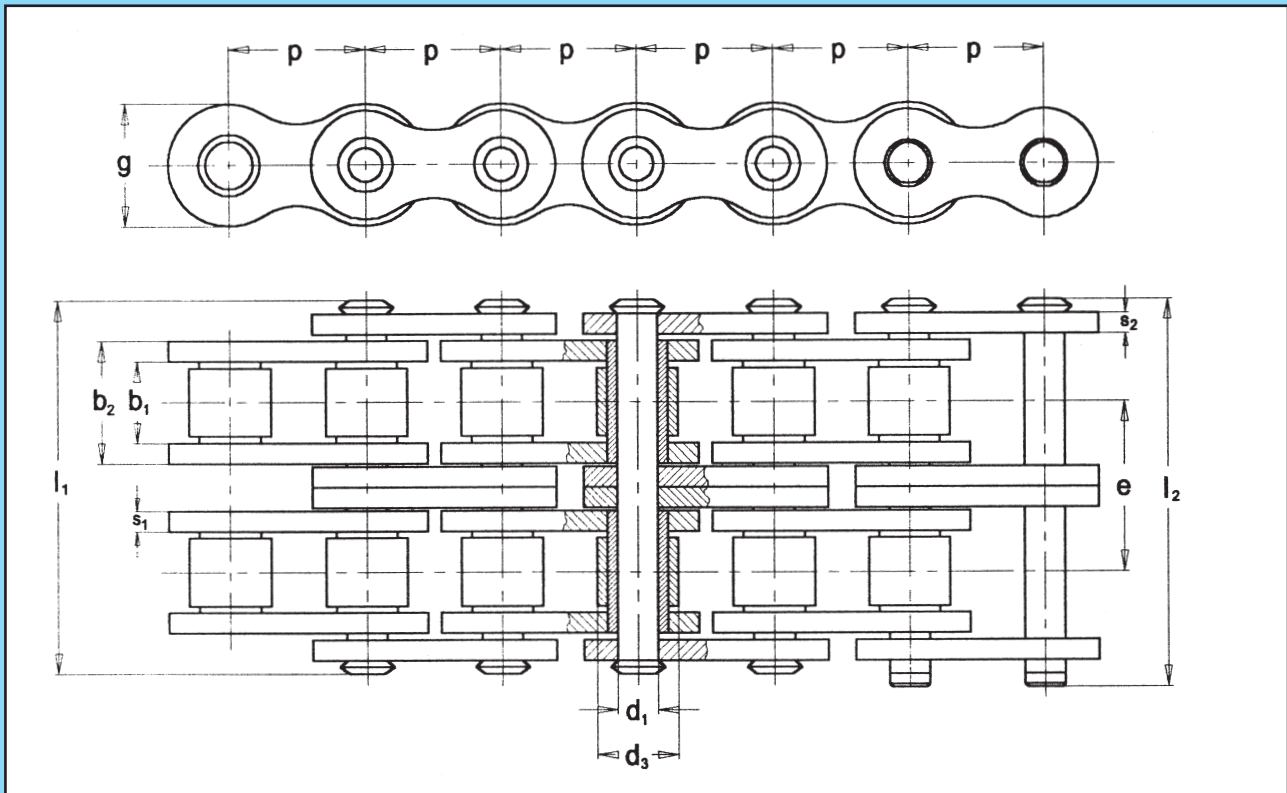

ISO Nr.	Obj. čís.	$p$ mm	$b_1$ mm min.	$b_2$ mm max.	$d_1$ mm h9	$d_3$ mm h10	$l_1$ mm	$l_2$ mm	$g$ mm	$s_1$ mm	$s_2$ mm	$e$ mm	$f$ mm <sup>2</sup>	$F_B$ kN min.	$Q$ kg/m
08A-2	318 112 069 000	12,700	7,85	11,15	3,96	7,95	32,3	36,2	12,0	1,6	1,6	14,38	88	28,2	1,2
10A-2	318 112 089 000	15,875	9,40	13,80	5,08	10,16	39,9	44,0	15,0	2,0	2,0	18,11	140	44,4	1,9
12A-2	318 112 109 000	19,050	12,57	17,70	5,94	11,91	49,8	44,4	18,0	2,4	2,4	22,78	210	63,6	2,9
16A-2	318 112 129 000	25,400	15,75	22,40	7,92	15,85	62,7	66,0	23,6	3,0	3,0	29,29	356	113,4	5,0
16A-2H	318 152 004 000	25,400	15,75	24,40	7,92	15,85	67,5	70,0	23,6	4,0	3,5	32,30	385	113,4	6,5
20A-2	318 112 149 000	31,750	18,90	27,40	9,53	19,05	76,4	81,2	29,4	4,0	4,0	35,76	522	177,0	7,9
24A-2	318 112 169 000	38,100	25,22	35,30	11,10	22,23	96,3	100,9	35,0	5,0	5,0	45,44	784	254,0	11,8
28A-2	318 112 189 000	44,450	25,22	37,00	12,70	25,40	102,8	108,2	41,0	5,5	5,5	48,87	940	344,8	13,8
32A-2	318 112 209 000	50,800	31,55	45,00	14,27	28,58	124,0	128,2	47,0	6,5	6,5	58,55	1284	453,6	19,9
40A-2	318 112 229 000	63,500	37,85	54,70	19,84	39,68	151,0	157,0	59,0	8,0	8,0	71,55	2170	707,6	33,0
48A-2	318 112 249 000	76,200	47,35	67,50	23,80	47,63	183,0	191,0	70,0	9,5	9,5	87,83	3213	1020,6	44,0

$f$  = Plocha kĺbu  
 $F_B$  = Pevnosť pri pretrhnutí  
 $Q$  = Hmotnosť reťaze

$f$  = Gelenkfläche  
 $F_B$  = Bruchkraft  
 $Q$  = Kettengewicht

$f$  = Bearing area  
 $F_B$  = Breaking load  
 $Q$  = Chain weight