

Jednoradové valčkové reťaze


podľa DIN 8188 (Americké)
Rovné doštičky

Einfach Rollenketten

nach DIN 8188 (Amerikanische Bauart)
Geraden Laschen

Simple roller chains

to DIN 8188 (American series)
Straight plates

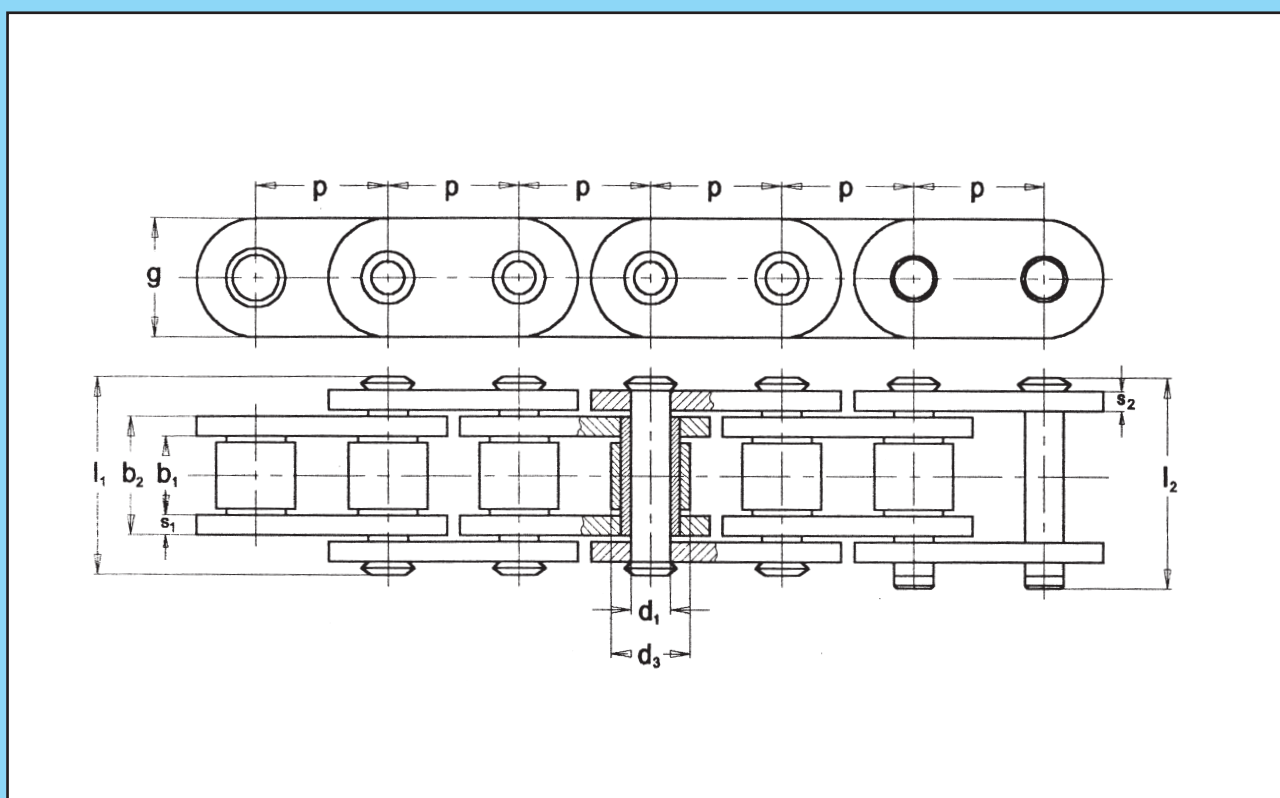

ISO Nr.	Obj. čís.	p mm	b_1 mm min.	b_2 mm max.	d_1 mm h9	d_3 mm h10	l_1 mm	l_2 mm	g mm	s_1 mm	s_2 mm	f mm ²	F_B kN min.	Q kg/m
16A-IRD	318 111 121 000	25,40	15,75	22,50	7,94	15,88	33,5	39,0	24,0	3,0	3,0	178	56,7	3,2
20A-IRD	318 111 141 000	31,75	18,90	27,40	9,53	19,05	40,5	45,2	29,4	4,0	4,0	261	88,5	4,4
24A-IRD	318 111 161 000	38,10	25,22	35,30	11,10	22,23	50,8	55,5	35,0	5,0	5,0	392	127,0	6,6
28A-IRD	318 111 181 000	44,45	25,22	37,00	12,70	25,40	54,7	59,3	41,0	5,5	5,5	470	172,4	7,7
32A-IRD	318 111 201 000	50,80	31,55	45,00	14,27	28,58	65,5	69,6	47,0	6,5	6,5	642	226,8	11,0

Pozn.:

Na požiadanie vo viacerých prevedeniach.

Bemerkung:

Auf Verlangen auch mehrfache Ausführung.

Note:

Also in multiple execution on request.

f = Plocha kĺbu
 F_B = Pevnosť pri pretrhnutí
 Q = Hmotnosť reťaze

f = Gelenkfläche
 F_B = Bruchkraft
 Q = Kettengewicht

f = Bearing area
 F_B = Breaking load
 Q = Chain weight