


Valčkové reťaze

nenormalizované

Rollenketten

Roller chains

non-standard

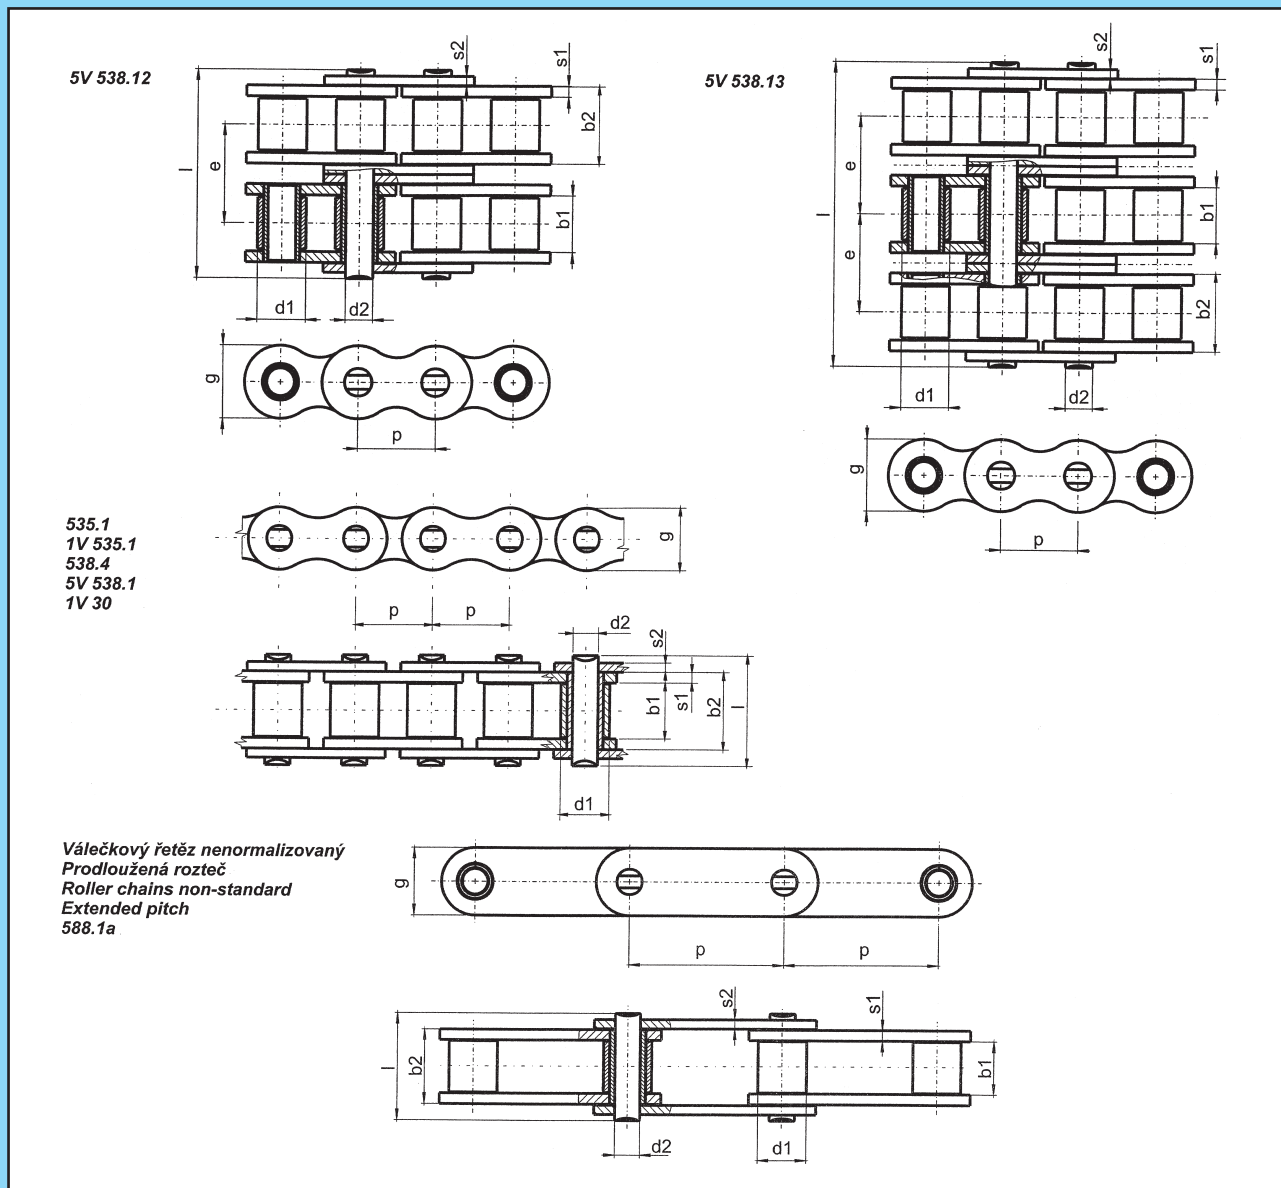

Válečkový reťaz nenormalizovaný
Prodloužená rozteč
Roller chains non-standard
Extended pitch
588.1a

ISO Nr.	Obj. čís.	p mm	b ₁ mm min.	b ₂ mm min.	d ₁ mm max.	d ₂ mm min.	e mm	g mm	s ₁ mm	s ₂ mm	l mm	f mm ²	F _B kN min.	Q kg/m
535.1	-	25,4	12,70	20,02	15,88	8,28	-	21,00	3,50	3,00	30,80	-	60,0	2,30
1V 535.1	-	25,4	12,70	21,20	15,88	8,28	-	21,00	4,00	4,00	32,50	-	60,0	2,63
538.4	-	25,4	12,70	20,20	15,88	8,92	-	24,00	3,50	3,50	30,80	-	78,0	2,70
5V 538.1	-	25,4	17,02	25,45	15,88	8,92	-	24,00	3,50	3,50	36,10	-	78,0	3,00
5V 538.12	-	25,4	17,02	-	15,88	8,92	31,88	24,00	3,50	3,50	67,50	-	143,0	5,70
5V 538.13	-	25,4	17,02	-	15,88	8,92	31,88	24,00	3,50	3,50	99,30	-	215,0	8,40
1V 30	-	30,0	17,02	25,45	15,88	8,28	-	20,00	3,50	3,50	35,60	-	60,0	2,20
588.1a	-	50,8	17,02	25,45	15,88	8,28	-	22,00	3,50	3,50	36,10	-	60,0	2,05

f = Plocha kĺbu
F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

f = Gelenkfläche
F_B = Bruchkraft
Q = Kettengewicht

f = Bearing area
F_B = Breaking load
Q = Chain weight