

Valčkové reťaze


s gumovými blokmi
podľa továrenskej normy

Rollenketten

mit Gummi Einlagen
nach Werksnorm

Roller chains

with rubber blocks
to works' standard

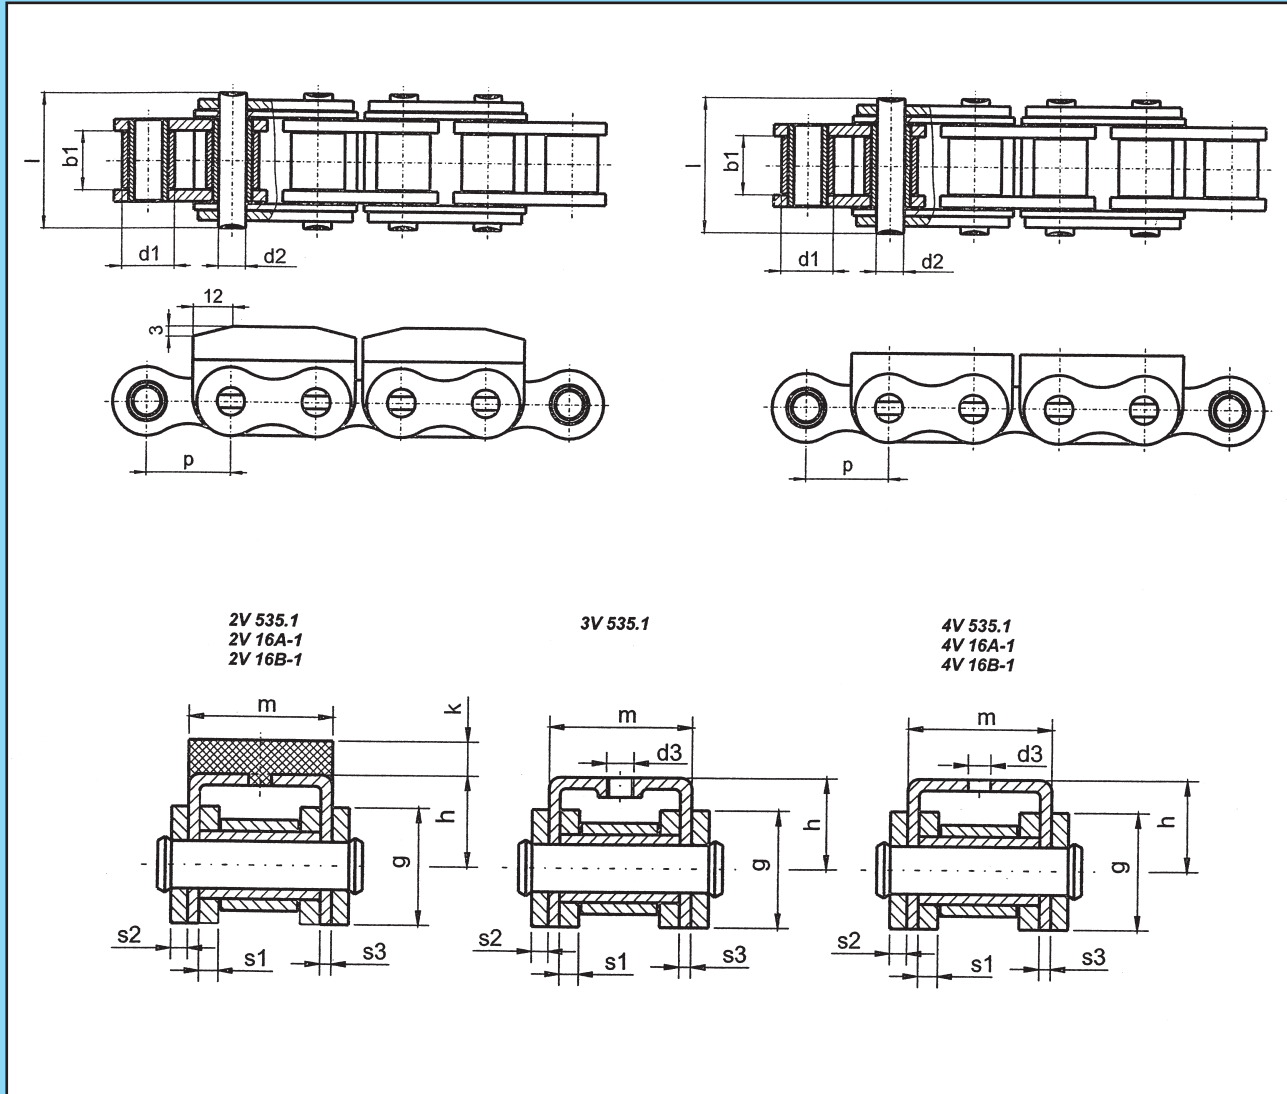

Tov. oz.	Obj. čís.	p mm	b ₁ min mm	d ₁ max mm	d ₂ max mm	d ₃ max mm	g max mm	m max mm	h max mm	k max mm	l max mm	s ₁ mm	s ₂ mm	s ₃ mm	F _B kN min	Q kg/m
2V 535.1	-	25,4	12,70	15,88	8,28	-	21,10	25,00	16,30	6,0	36,10	3,50	3,00	2,00	60	3,6
3V 535.1	-	25,4	12,70	15,88	8,28	M6	21,10	25,00	16,30	-	36,10	3,50	3,00	2,00	60	3,4
4V 535.1	-	25,4	12,70	15,88	8,28	4,50	21,10	25,00	16,30	-	36,10	3,50	3,00	2,00	60	3,4
2V 16B-1	-	25,4	12,70	15,88	8,28	-	21,10	30,00	16,30	6,0	41,00	3,50	3,00	2,00	60	4,1
4V 16B-1	-	25,4	12,70	15,88	8,28	6,40	21,10	30,00	16,30	-	41,00	3,50	3,00	2,00	60	3,9
2V 16A-1	-	25,4	12,70	15,88	8,28	-	24,10	27,00	16,30	6,0	38,00	3,00	3,00	2,00	57	4,1
4V 16A-1	-	25,4	12,70	15,88	8,28	6,40	24,00	27,00	16,30	-	38,00	3,00	3,00	2,00	57	3,9

F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

F_B = Bruchkraft
Q = Kettengewicht

F_B = Breaking load
Q = Chain weight