

## Pomalobežné puzdrové reťaze


podľa DIN 8164  
ČSN 02 3329

## Langsamläufige Buchsenketten

nach DIN 8164

## Low-speed bush chains

to DIN 8164

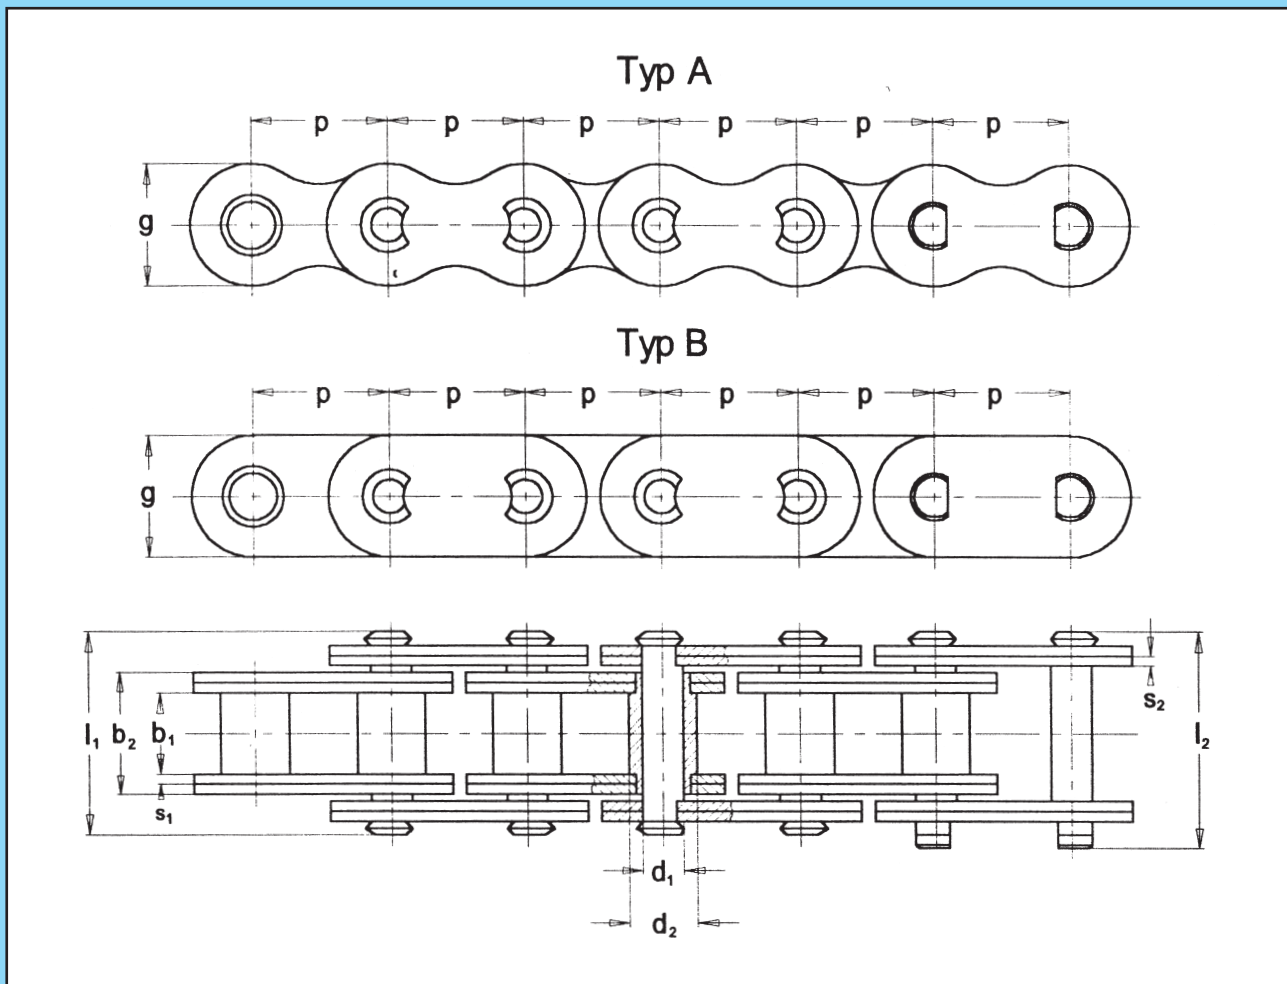

Tov. oz.	Obj. čís.	Typ mm	p mm min.	b <sub>1</sub> mm min.	b <sub>2</sub> mm max.	d <sub>1</sub> mm h11	d <sub>2</sub> mm	l <sub>1</sub> mm	l <sub>2</sub> mm	g mm	s <sub>1</sub> mm	s <sub>2</sub> mm	f mm <sup>2</sup>	F <sub>B</sub> kN min.	Q kg/m
TM 55	318 321 550 000	A	55	45	62,2	19,88	28	87	93,6	43	4,0	3,0	1210	125	10,36
TM 60	318 321 600 000	A	60	50	71,6	23,88	32	104	110,6	48	4,5	4,0	1680	160	15,20
TM 65	318 321 650 000	A	65	55	76,4	27,88	36	109	116,9	55	4,5	4,5	2100	200	18,60
TM 70	318 321 700 000	B	70	60	86,6	31,84	40	125	132,9	64	6,0	4,5	2720	250	27,20
TM 80	318 321 800 000	B	80	70	102,2	33,84	44	145	152,9	74	4,5	4,5	3600	315	36,40
TM 90	318 321 900 000	B	90	80	112,7	35,84	48	158	165,9	84	4,5	4,5	4000	400	44,20
TM 100	318 321 990 000	B	100	90	122,3	37,84	52	167	177,5	94	4,5	4,5	4580	500	50,50

f = Plocha kĺbu  
F<sub>B</sub> = Pevnosť pri pretrhnutí  
Q = Hmotnosť reťaze

f = Gelenkfläche  
F<sub>B</sub> = Bruchkraft  
Q = Kettengewicht

f = Bearing area  
F<sub>B</sub> = Breaking load  
Q = Chain weight