

## Unášače pre dopravné reťaze


podľa továrnej normy,  
tlačný typ

## Befestigungsglaschen für Föfrerketten

nach Werksnorm,  
Gedrückte Form

## Attachment úlates for conveyor chains

to works' standard,  
push type

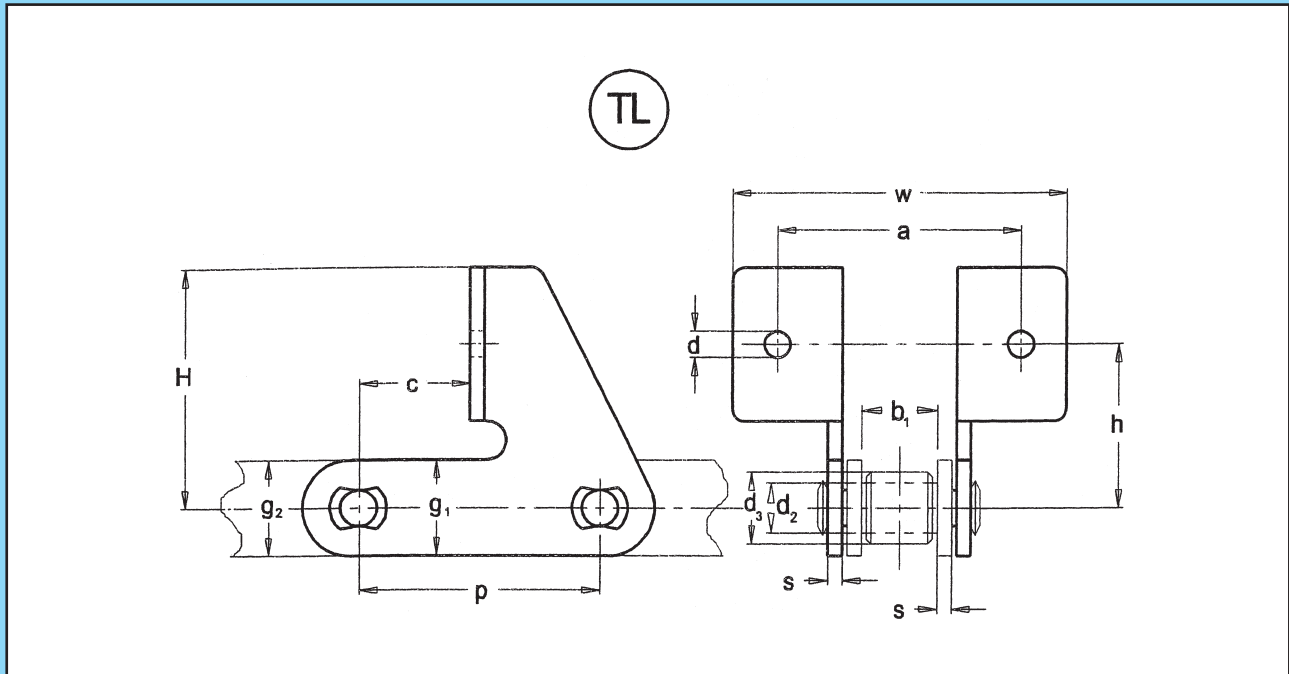

ISO Nr.	$p$ mm	$b_1$ mm	$d_2$ mm	$d_3$ mm	$F_B$ kN min.	$a$ mm	$w$ mm	$h$ mm	$H$ mm	$c$ mm	$d$ mm	$s$ mm	$g_1$ mm	$g_2$ mm
M 80	100	28	18	25	80	94	132	68	100	46	11	5	40	35
M 112	100	32	21	30	112	100	138	68	100	45	11	6	40	40
M 112	100	32	21	-	112	100	138	80	100	45	11	6	40	40
M 112	100	32	21	-	112	91	138	78	100	45	11	6	40	40
M 112	100	32	21	-	112	97	138	78	100	45	11	6	40	40
M 112	100	32	21	-	112	120	165	70	100	50	12	6	40	40
FV 90	100	26,5	20	-	90	94,5	132,5	68	100	45	11	6	40	40
FV 90	100	26,5	20	-	90	90	132,5	78	100	45	11	6	40	40
FV 90	100	25	20	-	90	90	130,5	78	100	45	11	6	40	40

□ = Vol'ná miera

$F_p$  = Pevnosť pri pretrhnutí

□ = Freimaß

$F_B$  = Bruchkraft

□ = Free dimension

$F_B$  = Breaking load